

GRS-7712VFB

输出功率: 约15~100W
OUTPUT: APPROX15~100W

代表的用途

- 园艺工具
- 搅拌机
- 滚刷电机


Typical Applications

- Power & Garden Tools
- Blender
- Brush Motor

型号 Model	电压 Voltage		无负载 No Load		最高效率时性能(%) At Maximum Efficiency				堵转 Stall	
	使用电压 Operating Range	常用 Nominal	转速(r/min) Speed	电流(A) Current	转速(r/min) Speed	电流(A) Current	扭矩(gcm) Torque	输出(W) Output	扭矩(gcm) Torque	电流(A) Current
GRS-7712VFB-16106	100~120 V	120 V	12000	0.09	10537	0.65	465	50	3818	4.7
GRS-7712VFB-12154	180~240 V	230 V	14800	0.08	12654	0.47	639	83	4407	2.8


GRS-7712VFB-16106

120V

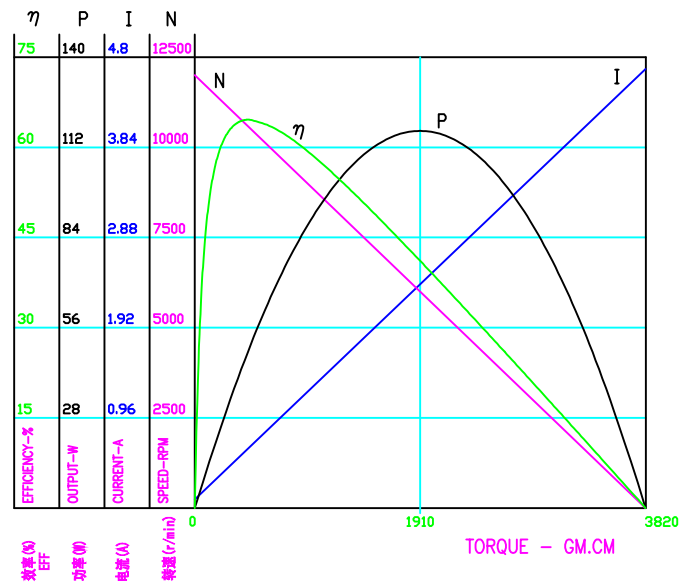

GRS-7712VFB-12154

230V

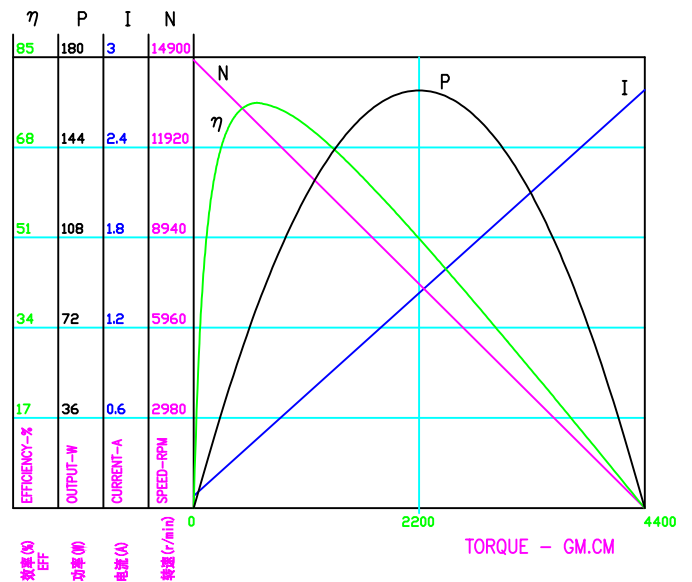

DIRECTION OF ROTATION

