

GFK/FF-180

输出功率: 约0.5~3.5W
OUTPUT: APPROX 0.5~3.5W

代表的用途/音响·映像设备

- 录音机
- 家用电器
- 电动剃须刀
- 牙刷


Typical Applications/Audio and Visual Equipments

- Tape recorder
- Household Appliances
- Electric Shaver
- Tooth Brush

型号 Model	电压 Voltage		无负载 No Load		最高效率时性能(%) At Maximum Efficiency				堵转 Stall	
	使用电压 Operating Range	常用 Nominal	转速(r/min) Speed	电流(A) Current	转速(r/min) Speed	电流(A) Current	扭矩(gcm) Torque	输出(W) Output	扭矩(gcm) Torque	电流(A) Current
GFF-180PH-2852	1~3	2.4V	8300	0.16	6900	0.86	18	1.27	116	4.57
GFF-180PH-4022	1.0~1.5	1.2V	9400	0.40	8000	1.80	15	1.23	107	9.90
GFK-180PH-4225	1.5~4.5	3V	25000	0.80	20725	3.878	34.2	7.27	200	18.8
GFK-180SH-16160	12~18	15V	16200	0.13	13700	0.72	39.5	5.6	258	4.0


GFF-180PH-2852

2.4V

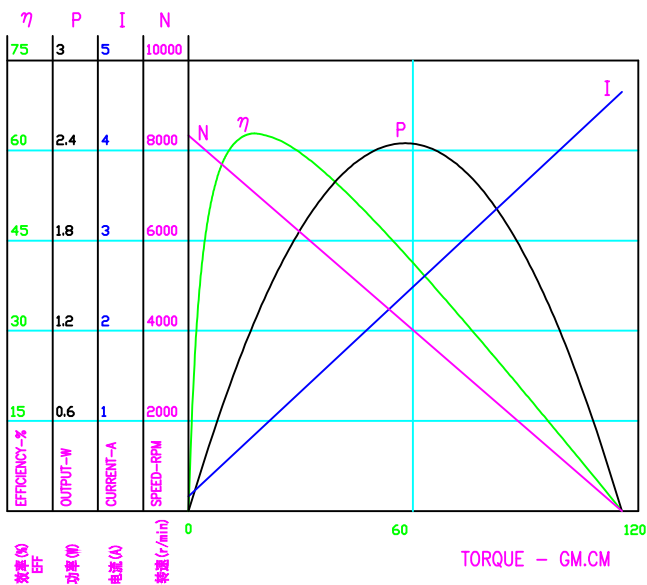

GFK-180PH-4225

3.0V

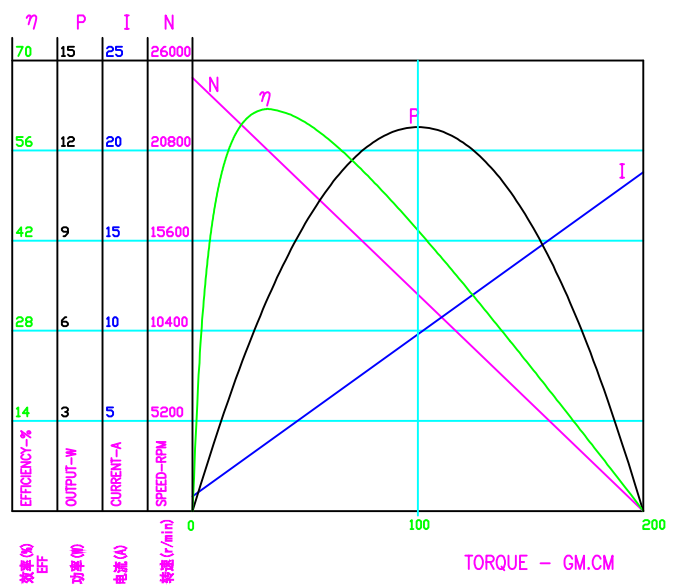

DIRECTION OF ROTATION

