

GRK-370SA

输出功率: 约0.5~25W
OUTPUT: APPROX 0.5~25W

代表的用途/办公自动化设备

- 风梳
- 无线电操纵模型
- 水泵/气泵


Typical Applications/Office Automation Equipments

- Styling Brush
- Radio Control Model
- Water Pump/Air Pump

型号 Model	电压 Voltage		无负载 No Load		最高效率时性能(%) At Maximum Efficiency				堵转 Stall	
	使用电压 Operating Range	常用 Nominal	转速(r/min) Speed	电流(A) Current	转速(r/min) Speed	电流(A) Current	扭矩(gcm) Torque	输出(W) Output	扭矩(gcm) Torque	电流(A) Current
GRK-370SA-10650	18~24	24V	5400	0.02	4602	0.11	40	1.89	270	0.60
GRK-370SA-14300	9~12	12V	5800	0.03	5091	0.21	33.5	1.75	273	1.55
GRK-370SA-20180	6~9	6V	4800	0.05	4212	0.36	32.3	1.40	264	2.57


GRK-370SA-10650

24.0V

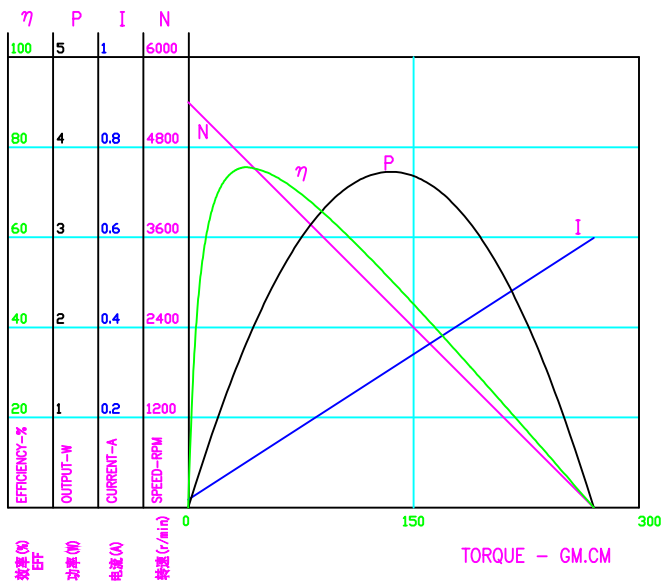

GRK-370SA-14300

12.0V

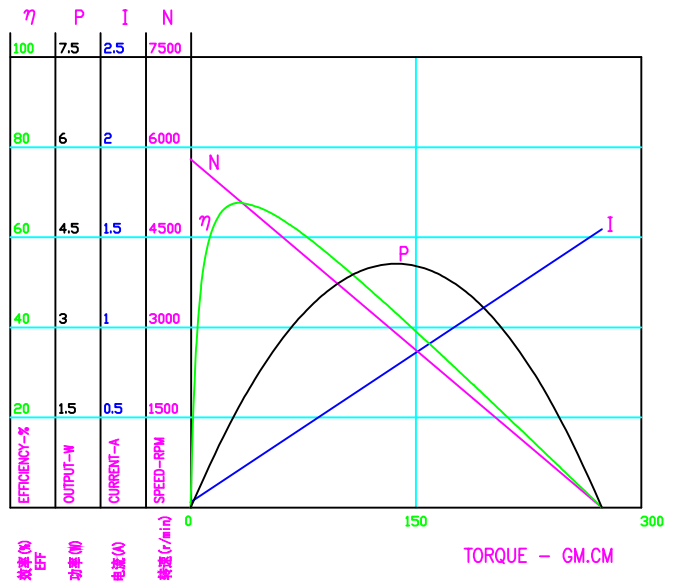

DIRECTION OF ROTATION

